




# SPECIFICATIONS & PARTS


## Zebra® Muscle™ Coalescer

### F15 Series - Technical Specifications


Barrel:	15 gallons (57 liters), 22" (56cm) high, 17" (43cm) diameter
Pump, Standard:	3 gpm (3.8 lpm), w/ max 4' lift, 4" (10cm) high, 3" (7.6cm) wide, 4" (10cm) long
Standard Electrical:	110v, 60Hz standard, or 220v, 50Hz upon request by adding "(E)" to end of part number
Pump, Option FXP18:	1/4" (6.4mm) port, 1-4 gpm (4-15 lpm) total range, requires 1 CFM at 20 PSI, 20' waterlift
Pump, Option FXP21:	3/8" (9.5mm) port, 1-1.5 gpm (3.8-5.7 lpm) total range, 115v, 60 Hz, 12' waterlift
Flowrate:	System regulated to operate at 1 gpm regardless of pump configuration
Oxygenator™:	110v 60Hz (or 220v, 50Hz), 42" (1.06cm) tubing w/bronze air diffuser, 1.5 watts, 1,000 cc/minute airflow
Hammerhead™:	4.5" (114mm) x 3.25" (82mm) x 1.75" (45mm) w/1' (304mm) oil intake hose (max length), 1 gpm (3.78 lpm) max flow rating
Sumpster™:	5" (127mm) x 4 1/4" (108mm) x 4 5/8" (117mm), 3gpm (11 lpm) max flow rating
Floating Sumpster™:	11" (279mm) x 12" (305mm) x 6" (152mm), 3gpm (11 lpm) max flow rating
Fine Stopper:	1 gallon (3.78 liters) capacity, (5) 100µ standard (50, 25, and 5µ sizes available upon request)
Dolly:	Polyethylene, 16 3/8" 41.4cm dia., (4) 3" (76mm) dia. casters, 600 lb. (272kg) capacity
Intake Hose:	48" (1.2m) long, 0.5" (12mm) ID (customization available to 15' (4.5m) (max)
Discharge Hose:	48" (1.2m) long, 1.25" (32mm) ID (customization available to 8' (2.4m) (max)
Maximum Temp:	100° F (38° C)
Shipping Weight:	28-31 pounds (12 to 14 kg), dimensional weight, dependent upon model

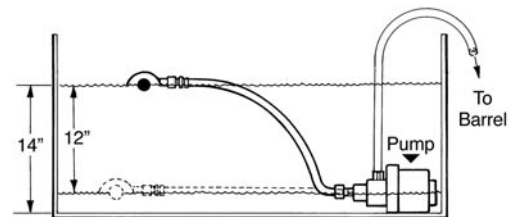

A. HAMMERHEAD  
4.5 x 3.25 x 1.75"

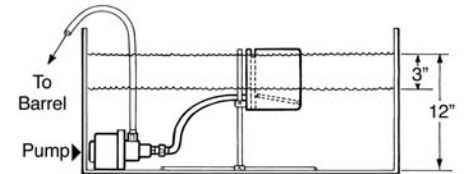

B. SUMPSTER  
5 x 4.25 x 4.625"

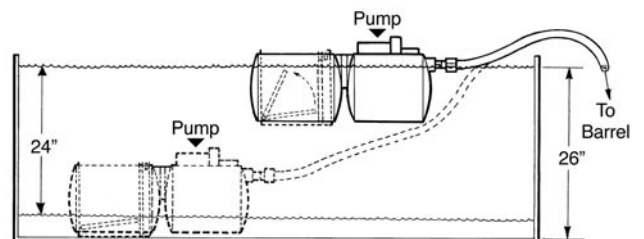

C. FLOATING SUMPSTER  
13 x 11 x 7"

### F15 Series - Replacement Parts & Accessories

FXB100-10	Replacement filter bags, set of 10, 100µ
FXB050-10	Replacement filter bags, set of 10, 50µ
FXB005-10	Replacement filter bags, set of 10, 5µ
SK02D12F	Zebra Hammerhead floating skimmer attachment
SK10A7	Zebra Sumpster free-standing skimmer attachment
SK10B2.3S	Zebra Floating Sumpster skimmer attachment
FXP3	Standard 3 gpm centrifugal pump
FXP18	Optional 1/4" air-diaphragm pump
FXP21	Optional 1/4" electric-diaphragm pump
FXDD15	Drum dolly
FXCC	Coalescing cartridge
FXCM003	Coalescing media (1 cubic foot)
FXODS	Internal Oil Discharge Skimmer
XBUB1200F	Small Oxygenator for Muscle
FX15B	15 gallon barrel w/spin-welded bulkhead fittings
SKXQXC1	Cam-lock quick connect, male
SKXQXC2	Cam-lock quick connect, female
SKXQXD1	Fluid-tight quick disconnect, male
SKXQXD2	Fluid-tight quick disconnect, female
SK95	Clear spiral wound, 1.25" ID, 1' section
SK97	Clear braided hose 1/2" ID, 1' section
SK99	Black flexible hose, 1/2" ID, 1' section

Zebra Skimmers Corporation  
 PO Box 833 Chagrin Falls, OH 44022  
[www.ZebraSkimmers.com](http://www.ZebraSkimmers.com)  
[www.CoolantMaintenance.com](http://www.CoolantMaintenance.com)  
 Toll Free 888-249-4855  
 Phone: 440.349.0141  
 Fax: 440.349.1211

©November2007 Zebra Skimmers Corp. All rights reserved.

Contact your distributor  
for more information